

# Audience AV27

In this documentation you will find information about:

- Description
- Placement / rigging
- Dynamic Damping Control™
- Maintenance
- Connections
- Options
- Software
- Technical specifications

## Description

The AV-27 Line Array Element is designed to deliver outstanding music and speech reproduction in a variety of applications including outdoor events, classical and theatrical productions and A/V presentations of all types.

Where other line-array manufacturers have to develop special waveguides and adaptors to convert a spherical pattern into a flat wave front, SA's SA8535 neodymium ribbon high frequency driver has the perfect radiation pattern for building line arrays. Therefore it is no surprise that this driver is the core of the AV27 design. Also, the feather light membrane guarantees an unmatched frequency response in excess of 20kHz, without break-up artifacts that are inherent to compression drivers.

The important midrange band is handled by two SA806 8" drivers. Direct radiation provides a smooth, warm uncolored sound in this critical band. The efficiency is surprisingly high for a direct radiating design.

Where both midrange and high frequency sections match perfectly in maximum SPL, we needed a similar efficient low frequency section. One direct radiating 15" wouldn't be able to cope with the mid and high section, and a double 15" setup would make the cabinet larger and heavier than we intended. So we opted for a band-pass design with a single 15" loudspeaker, that is tuned for maximum efficiency between 70Hz and 200Hz. This way only a single amplifier channel is needed for the LF channel. The AV27 is therefore extremely amplifier friendly.

All frequency sections (LF/MF/HF) have a 8Ω impedance, so a rack of two stereo amplifiers can drive 4 x AV27 with one amp channel left for subwoofers.

All these components make the AV27 the world's most powerful "ribbon" line array to date!


## Placement / rigging

With the single 15" loudspeaker mounted at the back of the cabinet, the AV27 has excellent stability, and can easily be ground stacked up to 6 cabinets high without additional hardware. Note also that the cabinet weighs less than 75 kg (including flying hardware), making it an easy lift.

All the rigging hardware that is needed to fly the cabinet is inside, so no forgotten or missing hardware and no additional flight cases. Flying the system is extremely easy and done in no time. A 16 cabinet array can be hang in less than 30 minutes by two men. The grid is extremely versatile. Arrays can be hang with one, two or three hoists, without additional steels or chains.

## Wiring for DDC™

For absolute top quality sound reproduction, the AV27 is equipped with Dynamic Damping Control™. The DDC™ system is based on two loudspeaker wires that return from the speaker to the (SA) amplifier. The picture on the below shows the wiring of a SpeakON NL4 connector in combination with the DDC™ system.

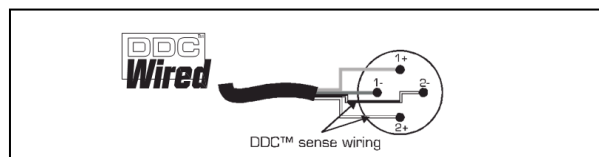

## Maintenance

Maintenance on the AV27, especially on the drivers, is best left to official Stage Accompany service personnel. However, cleaning of the cabinet can easily be done by yourself with a damp lint-free cloth.

## Connections


The AV27 is fitted with a SpeakON NL8 at the backside of the cabinet. (Caution: when linking, make sure nominal impedance stays within amplifier specification!).

## Options

The AV27 is standard finished in SA Black Protecture, but is also available in any possible RAL color (Multi Color Option™).

## Software

The accompanying AV27 Pointer software will show you exactly what splay to use between the cabinets and will warn you if you intend to overload the systems strength.

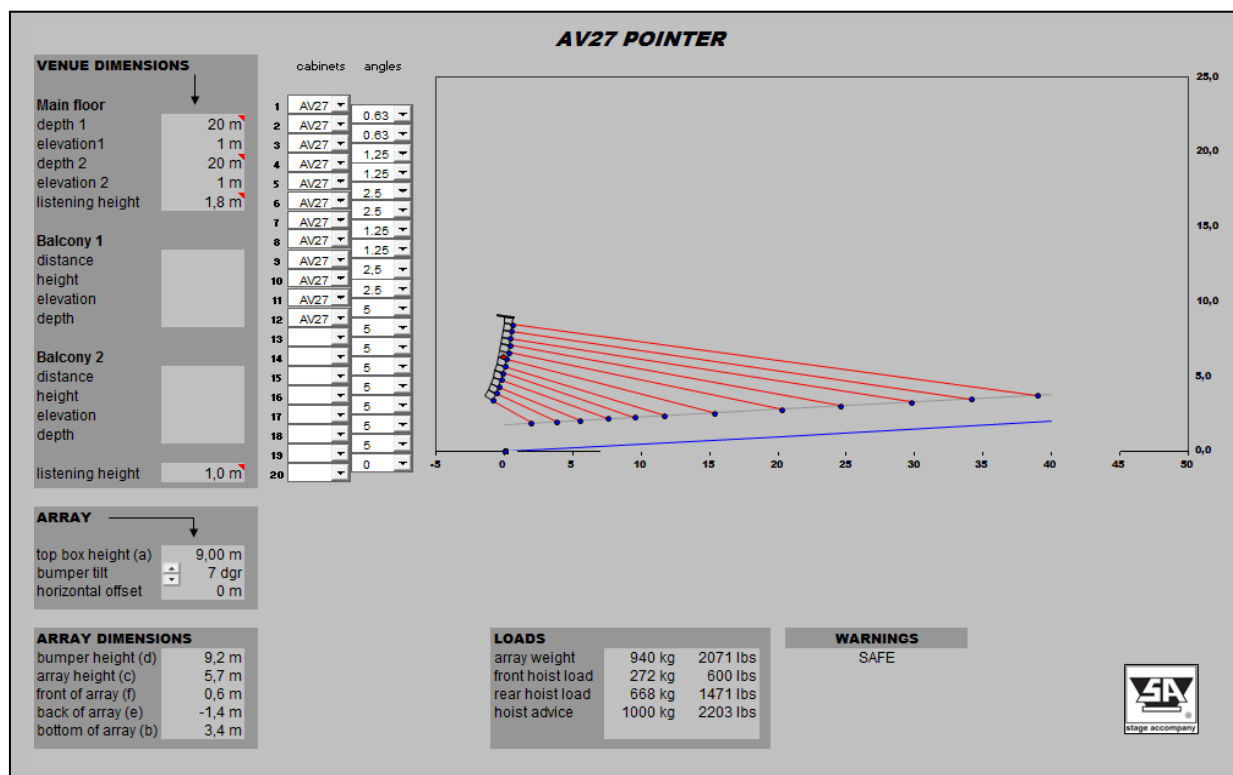

The AV27 Pointer software can be downloaded at the Stage Accompany website through the link below:

[http://www.stageaccompany.com/support/downloadnew/av27pointer\\_v1.zip](http://www.stageaccompany.com/support/downloadnew/av27pointer_v1.zip)

## Technical specifications

|                                   |                                                                                                       |
|-----------------------------------|-------------------------------------------------------------------------------------------------------|
| Frequency response                | : 70Hz – 30kHz (+/- 3dB)                                                                              |
| Usable band width                 | : 55Hz – 30kHz (+/- 10dB)                                                                             |
| Transducers                       | : 1 x SA1508N, 15" neodymium LF driver<br>2 x SA0806, 8" MF driver<br>2 x SA8535, neodymium HF driver |
| Cross-over frequencies            | : 200Hz - 1700Hz                                                                                      |
| Nominal impedance                 | : 8Ω LF, 8Ω MF, 8Ω HF                                                                                 |
| Sensitivity @ 1W/1m               | : 104dB LF, 108dB MF, 115dB HF                                                                        |
| Max. RMS power                    | : 400W LF, 200W MF, 120W HF                                                                           |
| Max. Peak power                   | : 800W LF, 1000W MF, 2000W HF                                                                         |
| SPL program                       | : 130dB                                                                                               |
| Coverage angles                   | : horizontal 75° (300Hz – 30kHz), vertical varies with array configuration                            |
| Enclosure angles                  | : 0°, 0.63°, 1.25°, 2.5°, 5°                                                                          |
| Signal processing                 | : presets for various controllers are available on request                                            |
| Rigging                           | : integrated flying Hardware                                                                          |
| Max. load rated per vertical drop | : 16 enclosures                                                                                       |
| Enclosure construction            | : 15mm Birch plywood, 8 handles, Protecture finish                                                    |
| Color                             | : SA Black, other colors on request                                                                   |
| Front                             | : expanded steel with acoustic transparent cloth                                                      |
| Connectors                        | : 2 x SpeakON NL8 (linked), DDC prewired for LF                                                       |
| Physical dimensions (H x W x D)   | : 460mm x 1200mm x 600mm (18.1" x 47.2" x 23.6")                                                      |
| Weight                            | : 72kg (158.7lb)                                                                                      |
| Warranty                          | : 5 years limited (1 year on 'moving parts')                                                          |



Stage Accompany bv  
Haven 28  
2984 BR Ridderkerk  
The Netherlands  
Tel; 31 (0)180 426225  
Fax: 31 (0)180 421831  
E-mail: [info@StageAccompany.com](mailto:info@StageAccompany.com)

Copyright 2013 Stage Accompany bv.  
The information in this document is continually being developed. Whilst every effort has been made to make it as accurate as possible, no warranty of accuracy is made or implied by the makers. Stage accompany shall have neither liability, nor responsibility to any person or entity with the respect to loss or damages in connection with or arising from the information contained in this document

# That's How Music Should Sound!